



# SOLERA<sup>®</sup>

High performance insulated translucent glazing units with the quality and permanence that comes only with glass.

## PRODUCT DATA

### SOLERA SAMPLE DETAILS


Project Name: N/A

Solera Type: Solera L

Unit Thickness: Nominal 1" (25mm)

Composition:

Exterior Glass: 6mm annealed  
Surface 2: Light diffusing veil  
Surface 3: Light diffusing veil  
Interior Glass: 6mm annealed

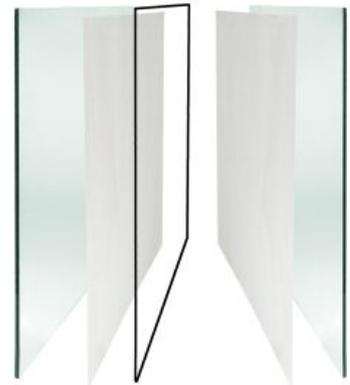

### Performance Parameters

Visible Light transmittance: 12%-62 %  
SHGC: 0.11-0.58  
SC: 0.14-0.69  
U-Value: 0.47 (Btu/hr-ft<sup>2</sup>-°F)  
U-Value (SI units): 2.65 (W/m<sup>2</sup>-K)  
Light Diffusion Power: Excellent

### Product Data

For additional product information visit the following website:

[www.advancedglazings.com/data](http://www.advancedglazings.com/data)

There you will find drawings, installation instructions, warranty and more.

ADVANCED GLAZINGS LTD.

P.O. Box 1460  
Station A  
Sydney, NS, Canada  
B1P 6R7

Tel. 902.794.2899  
Fax. 902.794.1869  
info@advancedglazings.com  
www.advancedglazings.com